

# AC192 Series

Compact Multipurpose Accelerometer, Top Exit 2 Pin Connector, 100 mV/g, ±10%



VIBRATION ANALYSIS HARDWARE



## Product Features

High Performance in an Affordable Compact Sensor

Very Low Noise and Superior RF Immunity


- ▶ 100 mV/g Sensitivity, ± 10%
- ▶ ± 80g Dynamic Range
- ▶ Standard 2 Pin MIL Connection or Integral Cable

Note: Integral Cable Options are only for Permanent Monitoring Applications

### AC192-1D

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

### AC192-2D

CB103 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC192-3D

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC192-6D

CB611 Heavy Duty Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC192-6N

CB111 Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC192	M/ or M8/AC192	<u>Environmental</u>		
Sensitivity (±10%)	100 mV/g		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (±3dB)	24-780,000 CPM	0.4-13000 Hz	Maximum Shock Protection	5000 g, Peak	
Frequency Response (±10%)	60-540,000 CPM	1.0-9000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 80 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	Welded, Hermetic	
<u>Electrical</u>			Submersible Depth	200 ft.	60 m
Settling Time	<2 Seconds		SIL Rating	SIL 2	
Voltage Source (IEPE)	18-30 VDC		<u>Physical</u>		
Constant Current Excitation	2-10 mA		Sensing Element	PZT Ceramic	
Spectral Noise @ 10 Hz	8 µg/√Hz		Sensing Structure	Shear Mode	
Spectral Noise @ 100 Hz	4 µg/√Hz		Weight	1.8 oz	51 grams
Spectral Noise @ 1000 Hz	2 µg/√Hz		Case Material	316L Stainless Steel	
Output Impedance	<100 ohm		Mounting Thread	1/4-28 Blind Tapped Hole	
Bias Output Voltage	10-14 VDC		Connector (Non-Integral)	2 Pin MIL-C-5015	
Case Isolation	>10 <sup>8</sup> ohm		Resonant Frequency	1,560,000 CPM	26000 Hz
			Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
			Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
			Calibration Certificate	CA10	

## Typical Frequency Response

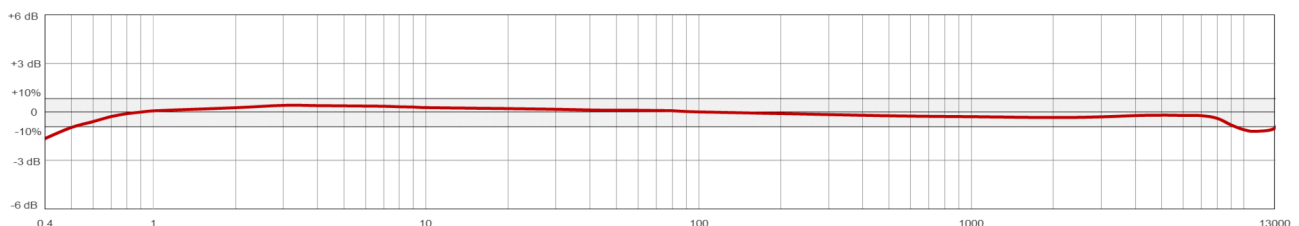

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900